



TL-395

Test Report issued under the responsibility of:



<b>TEST REPORT</b> <b>IEC 62109-2</b> <b>Safety of Power Converter for use in Photovoltaic Power Systems</b> <b>Part 2: Particular requirements for inverters</b>	
<b>Report Number</b> .....	251009087GZU-001
<b>Date of issue</b> .....	23 Dec. 2025
<b>Total number of pages</b> .....	33 pages
<b>Name of Testing Laboratory preparing the Report</b> .....	Intertek Testing Services Shenzhen Ltd. Guangzhou Branch Room101/301/401/102/202/302/402/502/602/702/802, No. 7-2, Caipin Road, Huangpu District, Guangzhou, Guangdong, China
<b>Applicant's name</b> .....	Hyosung Heavy Industries Corporation
<b>Address</b> .....	Hyosung Building, 119, Mapo-daero, Mapo-gu, Seoul, Republic of Korea
<b>Test specification:</b>	
<b>Standard</b> .....	IEC/EN 62109-2:2011
<b>Test procedure</b> .....	Type approval
<b>Non-standard test method</b> .....	N/A
<b>Test Report Form No</b> .....	IEC62109_2B
<b>Test Report Form(s) Originator</b> .....	LCIE - Laboratoire Central des Industries Electriques
<b>Master TRF</b> .....	Dated 2016-11
<b>Copyright © 2016 IEC System of Conformity Assessment Schemes for Electrotechnical Equipment and Components (IECEE System). All rights reserved.</b>	
This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.	
<b>This report is not valid as a CB Test Report unless signed by an approved CB Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02.</b>	
<b>General disclaimer:</b>	
The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Issuing CB Testing Laboratory. The authenticity of this Test Report and its contents can be verified by contacting the NCB, responsible for this Test Report.	

<b>Test item description .....</b>	<b>:</b> Solar Inverter
<b>Trade Mark .....</b>	<b>:</b> 
<b>Manufacturer .....</b>	<b>:</b> Same as applicant
<b>Model/Type reference .....</b>	<b>:</b> HS-P160GLO
<b>Ratings .....</b>	<b>:</b> See page 10 for detail

<b>Responsible Testing Laboratory (as applicable), testing procedure and testing location(s):</b>		
<input checked="" type="checkbox"/>	<b>Testing Laboratory:</b>	Intertek Testing Services Shenzhen Ltd. Guangzhou Branch
<b>Testing location/ address .....</b>		Room101/301/401/102/202/302/402/502/602/702/802, No. 7-2, Caipin Road, Huangpu District, Guangzhou, Guangdong, China
<b>Tested by (name, function, signature) .....</b>		Boyce Wang Engineer <i>Boyce Wang</i>
<b>Approved by (name, function, signature) ..</b>		Elly Han Project Manager <i>Elly Han</i>
<input type="checkbox"/>	<b>Testing procedure: CTF Stage 1:</b>	N/A
<b>Testing location/ address .....</b>		N/A
<b>Tested by (name, function, signature) .....</b>		N/A
<b>Approved by (name, function, signature) ..</b>		N/A
<input type="checkbox"/>	<b>Testing procedure: CTF Stage 2:</b>	N/A
<b>Testing location/ address .....</b>		N/A
<b>Tested by (name + signature).....</b>		N/A
<b>Witnessed by (name, function, signature) .</b>		N/A
<b>Approved by (name, function, signature) ..</b>		N/A
<input type="checkbox"/>	<b>Testing procedure: CTF Stage 3:</b>	N/A
<input type="checkbox"/>	<b>Testing procedure: CTF Stage 4:</b>	N/A
<b>Testing location/ address .....</b>		N/A
<b>Tested by (name, function, signature) .....</b>		N/A
<b>Witnessed by (name, function, signature) .</b>		N/A
<b>Approved by (name, function, signature) ..</b>		N/A
<b>Supervised by (name, function, signature) :</b>		N/A

**List of Attachments (including a total number of pages in each attachment):**

Appendix 1: photos (4 pages)

### Summary of testing:

**Tests performed (name of test and test clause):**

All applicable tests

Other than special notes, the typical model HS-P160GLO is used as representative for testing in this report.

**Testing location:**

Intertek Testing Services Shenzhen Ltd.  
Guangzhou Branch



Room101/301/401/102/202/302/402/502/602/702/802, No. 7-2, Caipin Road, Huangpu District, Guangzhou, Guangdong, China

**Summary of compliance with National Differences (List of countries addressed):**

**N/A**


☒ **The product fulfils the requirements of IEC/EN 62109-2:2011.**

Copy of marking plate:

<b>HYOSUNG</b> HEAVY INDUSTRIES		<b>GENTOPIA</b> Grid Connected Photovoltaic Inverter	
Model No.: HS-P160GLO 접속함일체형태양광인버터(계통연계형)			
입력전압범위 : 200-1000Vdc	정격 출력전압 : 220/380Vac	정격 입력전압 : 620Vdc	최대 출력전류 : 253.2A
MPPT 동작범위 : 200-1000Vdc	정격 주파수 : 60Hz	MPPT 전압범위 : 540-800Vdc	출력방식(상 수) : 3P3W+(N)+PE
최대 입력전류 : 336A	사용환경 : 실외형	MPPT 회로 수 : 7개	무게 : 98kg
MPPT 당 스트링 수 : 3개	IP등급 : IP66	총 스트링 채널 수 : 21개	형식 : 스트링 인버터
MPPT당 최대전류 : 48A	제조번호(S/N) : 별도표기	스트링 당 최대전류 : 16A	제조 일자 : 별도표기
통신방식 : RS485			
크기(WxHxD) : 1000×710(+380)×395mm			
KS표준번호 : KS C 8565			
KS표준명 : 태양광 발전용 인버터(접속함일체형)			
KS인증번호 : PV0424058			
모델코드 : PV-AGTI-1-4438			
인증취득일 : 2025.08.14			
인증기관 : 한국에너지공단 신재생에너지센터			
제조사 : Dongguan Yang Tian Electron Technology Co., Ltd			
공장 : 152 Luyuan Road, Tangxia Town, Dongguan City			
수입사 : 효성중공업(주)			
사무소 : 서울특별시 마포구 마포대로 119(본사)			
연락처(A/S) : 1899-4159			
 i-bright			
HYOSUNG HEAVY INDUSTRIES CORPORATION		AUTHORIZED BY HYOSUNG MADE IN CHINA	

<b>HYOSUNG</b> HEAVY INDUSTRIES		<b>GENTOPIA</b> Grid Connected Photovoltaic Inverter	
Model No.: HS-P160GLO Max. Input Voltage : 1100Vdc Isc : 66×7A Output Rated Power : 150kW Max. Output Power : 165kW (cosψ=1) Power Factor : 0.8 (lagging) – 0.8(leading) Protection Class : Class I			
HYOSUNG HEAVY INDUSTRIES CORPORATION		AUTHORIZED BY HYOSUNG MADE IN CHINA	

Warning marking for all models

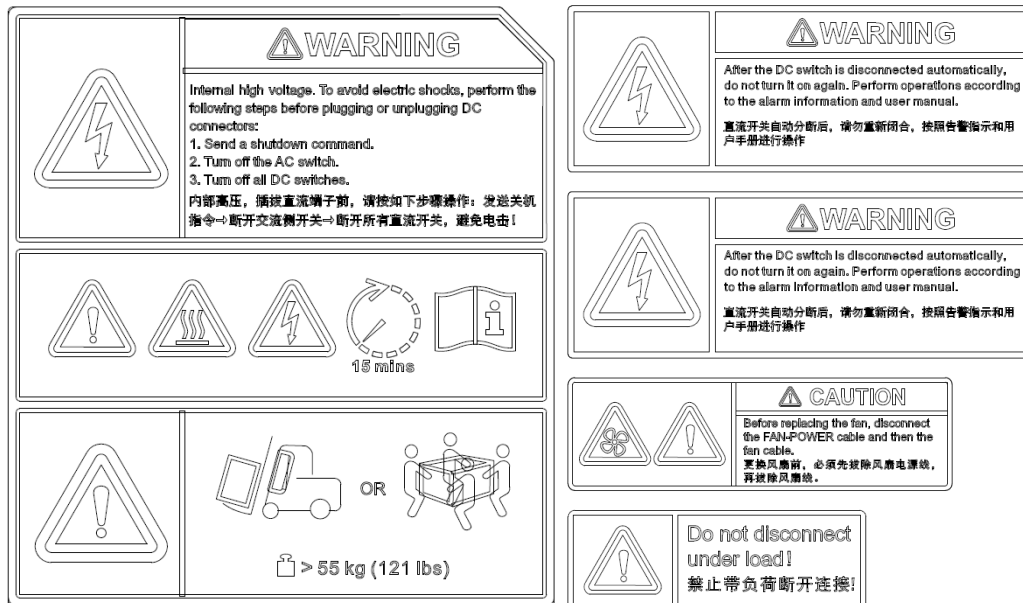

**Note:**

1. above markings are the minimum requirements required by the safety standard. For the final production samples, the additional markings which do not give rise to misunderstanding may be added.
2. Label is attached on the side surface of enclosure and visible after installation.

<b>Test item particulars .....</b>	
<b>Equipment mobility .....</b>	<input type="checkbox"/> movable <input type="checkbox"/> hand-held <input type="checkbox"/> stationary <input checked="" type="checkbox"/> fixed <input type="checkbox"/> transportable <input type="checkbox"/> for building-in
<b>Connection to the mains .....</b>	<input type="checkbox"/> pluggable equipment <input type="checkbox"/> direct plug-in <input checked="" type="checkbox"/> permanent connection <input type="checkbox"/> for building-in
<b>Enviromental category.....</b>	<input checked="" type="checkbox"/> outdoor <input type="checkbox"/> indoor unconditional <input type="checkbox"/> indoor conditional
<b>Over voltage category Mains .....</b>	<input type="checkbox"/> OVC I <input type="checkbox"/> OVC II <input checked="" type="checkbox"/> OVC III <input type="checkbox"/> OVC IV
<b>Over voltage category PV.....</b>	<input type="checkbox"/> OVC I <input checked="" type="checkbox"/> OVC II <input type="checkbox"/> OVC III <input type="checkbox"/> OVC IV
<b>Mains supply tolerance (%).....</b>	-90 / +110 %
<b>Tested for power systems.....</b>	TN-S, TN-C, TN-C-S, TT, IT
<b>IT testing, phase-phase voltage (V) .....</b>	---
<b>Class of equipment .....</b>	<input checked="" type="checkbox"/> Class I <input type="checkbox"/> Class II <input type="checkbox"/> Class III <input type="checkbox"/> Not classified
<b>Mass of equipment (kg) .....</b>	Approx. 102 kg
<b>Pollution degree .....</b>	Outside PD3; Inside PD2
<b>IP protection class.....</b>	IP 66
<b>.....</b>	
<b>Possible test case verdicts:</b>	
- test case does not apply to the test object ..... : N/A	
- test object does meet the requirement ..... : P (Pass)	
- test object does not meet the requirement ..... : F (Fail)	
<b>Testing .....</b>	
<b>Date of receipt of test item .....</b> : 2024-03-18	
<b>Date (s) of performance of tests.....</b> : 2024-03-19 to 2024-04-10	

**General remarks:**

"(See Enclosure #)" refers to additional information appended to the report.  
"(See appended table)" refers to a table appended to the report.

**Throughout this report a ☐ comma / ☒ point is used as the decimal separator.**

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

**This report is based on the original Report No. 240318205GZU-002 of 2024-05-13, update information as follow:**

1. update applicant's name, model name and trademark.
2. update marking.
3. Delete factory:

**Name:** Huawei Technologies Co., Ltd.

**Address:** Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, Guangdong, 518129, China

**The model HS-P160GLO in this report is the same as the model SUN2000-150K-MG0 in the report 240318205GZU-001, apart from the trademark and model name, and with the frequency (50Hz) and output voltage (400/480 V a.c.) specifications removed.**

**Re-evaluation testing is not required.**

**Manufacturer's Declaration per sub-clause 4.2.5 of IEC62109 02:**

The application for obtaining a CB Test Certificate includes more than one factory location and a declaration from the Manufacturer stating that the sample(s) submitted for evaluation is (are) representative of the products from each factory has been provided .....

- ☐ Yes  
☒ Not applicable

**When differences exist; they shall be identified in the General product information section.**

**Name and address of factory (ies).....:** Dongguan Yangtian Electron Technology Co., Ltd  
No. 152, Luyuan Road, Tangxia Town, Dongguan City, Guangdong Province, China




### General product information:

The solar inverter is a three-phase type inverter, which can convert high PV voltage to Grid voltage and feed into Grid network.

The unit does not provide galvanic separation from PV input to AC output.

The unit provides two relays in series on Line and neutral conductors. When single fault applied to one relay, alarm an error code in display panel, another redundant relay provides basic insulation maintained between the PV array and the mains.

### The topology diagram as following:

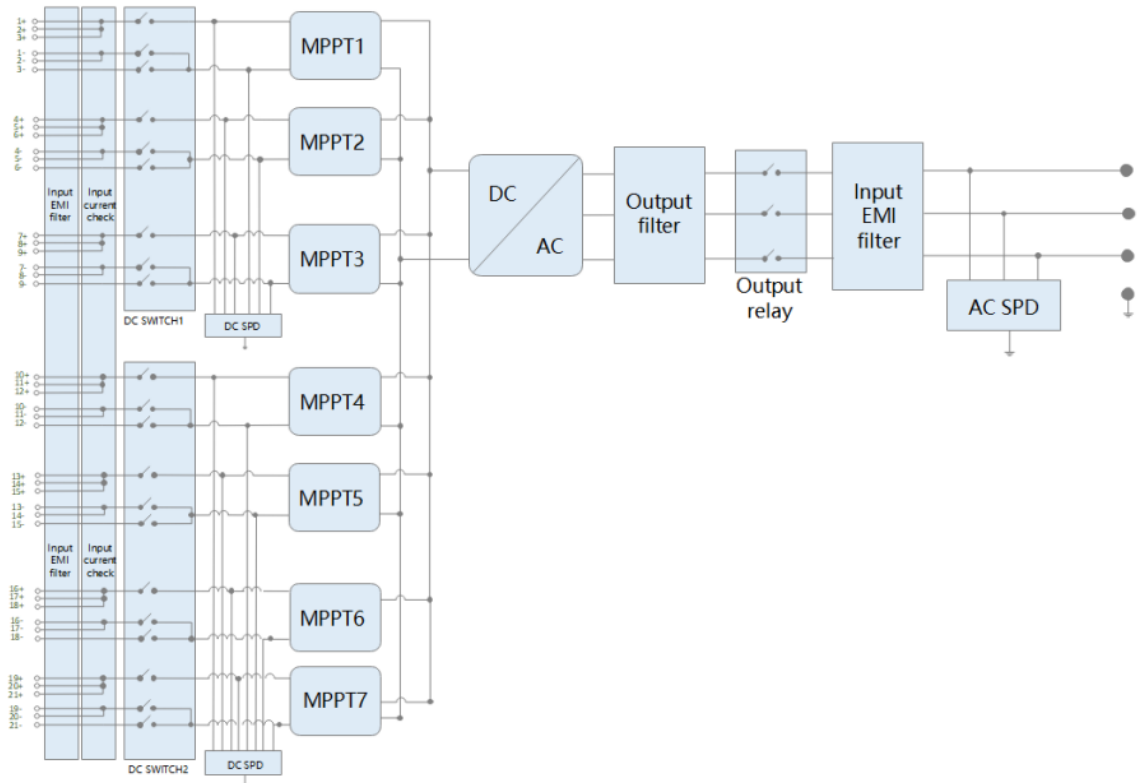

**Ratings:**

Model	HS-P160GLO
Max. Input Voltage [Vd.c.]	1100
Max. Input Current [A]	48x7
Isc [A]	66x7
MPPT range [Vd.c.]	200 - 1000
Output Nominal Voltage [Va.c.]	3(N)~, 220/380 Va.c.
Nominal Operating Frequency [Hz]	60
Output Rated Power [kW]	150
Max. Output Power [kW]	165 (cos $\psi$ =1)
Output max. Apparent Power [kVA]	165
Output Max. current [A]	253.2 A, 380 Va.c.
Power Factor	0.8 (lagging) – 0.8(leading)
Operating Temperature Range	-25 - +60°C
Enclosure protection code	IP66
Protection Class	Class I
Pollution Degree	Outside PD3; Inside PD2
AFCI	Type I
Firmware version	V600R023

IEC 62109-2			
Clause	Requirement + Test	Result - Remark	Verdict
<b>4</b>	<b>GENERAL TESTING REQUIREMENTS</b>		P
<b>4.4.4</b>	<b>Single fault conditions to be applied</b>		P
<b>4.4.4.15</b>	<b>Fault-tolerance of protection for grid-interactive inverters</b>		P
<b>4.4.4.15.1</b>	<b>Fault-tolerance of residual current monitoring according to 4.8.3.5: the residual current monitoring system operates properly</b>	See appended table 4.4.4.15.1	P
	a). - The inverter ceases to operate		P
	- Indicates a fault in accordance with §13.9		P
	- Disconnect from the mains		P
	- not re-connect after any sequence of removing and reconnecting PV power		P
	- not re-connect after any sequence of removing and reconnecting AC power		P
	- not re-connect after any sequence of removing and reconnecting both PV and AC power		P
	b). - The inverter continues to operate		N/A
	- the residual current monitoring system operates properly under single fault condition		N/A
	- Indicates a fault in accordance with §13.9		N/A
	c). - The inverter continues to operate regardless of loss of residual current monitoring functionality		N/A
	- not re-connect after any sequence of removing and reconnecting PV power		N/A
	- not re-connect after any sequence of removing and reconnecting AC power		N/A
	- not re-connect after any sequence of removing and reconnecting both PV and AC power		N/A
	- Indicates a fault in accordance with §13.9		N/A
<b>4.4.4.15.2</b>	<b>Fault-tolerance of automatic disconnecting means</b>		P
<b>4.4.4.15.2.1</b>	<b>The means provided for automatic disconnection of a grid-interactive inverter from the mains shall:</b>		P
	- disconnect all grounded current-carrying conductors from the mains	No grounded current-carrying conductors	N/A
	- disconnect all ungrounded current-carrying conductors from the mains		P
	- be such that with a single fault applied to the disconnection means or to any other location in the inverter, at least basic insulation or simple separation is maintained between the PV array and the mains when the disconnecting means is intended to be in the open state.	See appended table 4.4.4.15.2 Fault-tolerance of automatic disconnecting There are two relays in serial used as automatic disconnection means. Contact gap is >1.8 mm for each relay.	P
<b>4.4.4.15.2.2</b>	<b>Design of insulation or separation complies with requirements of 7.3.7 of Part 1: report here Part 1 comment and verdict.</b>	The automatic disconnection means is automatically checked	P

IEC 62109-2			
Clause	Requirement + Test	Result - Remark	Verdict
		before the inverter start operation	
<b>4.4.4.15.2.3</b>	<b>For non-isolated inverter, automatic checking of the isolation provided by a disconnect means after single fault.</b>	See appended test table 4.4.4.15.2 Fault-tolerance of automatic disconnecting.	P
	If the check fail: - any still-functional disconnection means shall be left in the open position		P
	- at least basic or simple separation shall be maintained between the PV input and the mains		P
	- the inverter shall not start operation		P
	- the inverter shall indicate a fault in accordance with 13.9		P
<b>4.4.4.16</b>	<b>A stand-alone inverter with a transfer switch to transfer AC loads from the mains or other AC bypass source to the inverter output:</b>		N/A
	- shall continue to operate normally		N/A
	- shall not present a risk of fire as the result of an out-of-phase transfer		N/A
	- shall not present a risk of shock as the result of an out-of-phase transfer		N/A
	- And having control preventing switching: components for malfunctioning .....		N/A
<b>4.4.4.17</b>	<b>Cooling system failure – Blanketing test</b> <b>No hazards according to the criteria of sub-clause 4.4.3 of Part 1 shall result from blanketing the inverter</b> <b>This test is not required for inverters restricted to use only in closed electrical operating areas.</b>	See appended test table Cooling system failure – Blanketing test.	P
	Test stop condition: time duration value or stabilized temperature .....		P
<b>4.7</b>	<b>ELECTRICAL RATINGS TESTS</b>		N/A
<b>4.7.4</b>	<b>Stand-alone Inverter AC output voltage and frequency</b>		N/A
<b>4.7.4.1</b>	<b>General</b>		N/A
<b>4.7.4.2</b>	<b>Steady state output voltage at nominal DC input</b> <b>The steady-state AC output voltage shall not be less than 90 % or more than 110 % of the rated nominal voltage with the inverter supplied with its nominal value of DC input voltage.</b>		N/A
<b>4.7.4.3</b>	<b>Steady state output voltage across the DC input range</b> <b>The steady-state AC output voltage shall not be less than 85 % or more than 110 % of the rated nominal voltage with the inverter supplied with any value within the rated range of DC input voltage.</b>		N/A
<b>4.7.4.4</b>	<b>Load step response of the output voltage at nominal DC input</b> <b>The AC output voltage shall not be less than 85 % or more than 110 % of the rated nominal voltage for more than 1,5 s after application or removal of a resistive load.</b>		N/A

IEC 62109-2			
Clause	Requirement + Test	Result - Remark	Verdict
4.7.4.5	<b>Steady state output frequency</b> The steady-state AC output frequency shall not vary from the nominal value by more than +4 % or –6 %.		N/A
4.7.5	<b>Stand-alone inverter output voltage waveform</b>		N/A
4.7.5.1	<b>General</b>		N/A
4.7.5.2	The AC output voltage waveform of a sinusoidal output stand-alone inverter shall have a total harmonic distortion (THD) not exceeding of 10 % and no individual harmonic at a level exceeding 6 %.		N/A
4.7.5.3	<b>Non-sinusoidal output waveform requirements</b>		N/A
4.7.5.3.1	<b>General</b>		N/A
4.7.5.3.2	The total harmonic distortion (THD) of the voltage waveform shall not exceed 40 %.		N/A
4.7.5.3.3	The slope of the rising and falling edges of the positive and negative half-cycles of the voltage waveform shall not exceed 10 V/μs measured between the points at which the waveform has a voltage of 10 % and 90 % of the peak voltage for that half-cycle.		N/A
4.7.5.3.4	The absolute value of the peak voltage of the positive and negative half-cycles of the waveform shall not exceed 1,414 times 110 % of the RMS value of the rated nominal AC output voltage.		N/A
4.7.5.4	<b>Information requirements for non-sinusoidal waveforms</b> The instructions provided with a stand-alone inverter not complying with 4.7.5.2 shall include the information in 5.3.2.6.		N/A
4.7.5.5	<b>Output voltage waveform requirements for inverters for dedicated loads.</b> For an inverter that is intended only for use with a known dedicated load, the following requirements may be used as an alternative to the waveform requirements in 4.7.5.2 to 4.7.5.3.		N/A
	The combination of the inverter and dedicated load shall be evaluated to ensure that the output waveform does not cause any hazards in the load equipment and inverter, or cause the load equipment to fail to comply with the applicable product safety standards.		N/A
	The inverter shall be marked with symbols 9 and 15 of Table C.1 of Part 1.		N/A
	The installation instructions provided with the inverter shall include the information in 5.3.2.13.		N/A
4.8	<b>ADDITIONAL TESTS FOR GRID-INTERACTIVE INVERTERS</b>		P
4.8.1	<b>General requirements regarding inverter isolation and array grounding</b>		P
	- Type of Array grounding supported .....		P
	- Inverter isolation .....		P
4.8.2	<b>Array insulation resistance detection for inverters for ungrounded and functionally grounded arrays</b>	(See attached table)	P
4.8.2.1	<b>Array insulation resistance detection for inverters for ungrounded arrays</b>		P

IEC 62109-2			
Clause	Requirement + Test	Result - Remark	Verdict
	Inverter shall have means to measure DC insulation resistance from PV input (array) to ground before starting operation		P
	Or Inverter shall be provided with instruction in accordance with 5.3.2.11.	The inverter can measure DC insulation resistance from PV input array to ground before starting operation	N/A
	Measured DC insulation resistance: .....:	See appended table	P
	Inverter measurement circuit shall be capable of detecting insulation resistance below the limit value $R = V_{max}/30mA$ under normal conditions		P
	Inverter measurement circuit shall be capable of detecting insulation resistance below the limit value $R = V_{max}/30mA$ with ground fault in the PV array		P
	Isolated inverters shall indicate a fault if the insulation resistance is less than the limit value		N/A
	Isolated inverter fault indication maintained until insulation resistance has recovered to a value higher than the limit value		N/A
	Non-isolated inverters, or inverters with isolation not complying with the leakage current limits in the minimum inverter isolation requirements in Table 30:		P
	- shall indicate a fault in accordance with 13.9		P
	- shall not connect to the mains		P
<b>4.8.2.2</b>	<b>Array insulation resistance detection for inverters for functionally grounded arrays</b>		N/A
	a-1) The value of the total resistance, including the intentional resistance for array functional grounding, the expected insulation resistance of the array to ground, and the resistance of any other networks connected to ground (for example measurement networks) must not be lower than $R = (V_{MAX} PV/30 \text{ mA})$ ohms.		N/A
	a-2) The installation instructions shall include the information required in 5.3.2.12.		N/A
	b-1) As an alternative to a), or if a resistor value lower than in a) is used, the inverter shall incorporate means to detect, during operation, if the total current through the resistor and any networks (for example measurement networks) in parallel with it, exceeds the residual current values and times in Table 31		N/A
	b-2) Inverter shall either disconnect the resistor or limit the current by other means .....:		N/A
	b-3) If the inverter is a non-isolated inverter, or has isolation not complying with the leakage current limits in the minimum inverter isolation requirements in Table 30, it shall also disconnect from the mains.		N/A
	c) The inverter shall have means to measure the DC insulation resistance from the PV input to ground before starting operation, in accordance with 4.8.2.1.		N/A
<b>4.8.3</b>	<b>Array residual current detection</b>		P
<b>4.8.3.1</b>	<b>General</b>		P

IEC 62109-2			
Clause	Requirement + Test	Result - Remark	Verdict
<b>4.8.3.2</b>	<b>30 mA touch current type test for isolated inverters</b>		N/A
<b>4.8.3.3</b>	<b>Fire hazard residual current type test for isolated inverters</b>		N/A
<b>4.8.3.4</b>	<b>Protection by application of RCD's</b>	Integrated GFCI inside PCE	P
	- The requirement for additional protection in 4.8.3.1 can be met by provision of an RCD with a residual current setting of 30 mA, located between the inverter and the mains.		P
	- The selection of the RCD type to ensure compatibility with the inverter must be made according to rules for RCD selection in Part 1.		P
	- The RCD provided integral to the inverter, or		P
	- The RCD provided by the installer if details of the rating, type, and location for the RCD are given in the installation instructions per 5.3.2.9.		N/A
<b>4.8.3.5</b>	<b>Protection by residual current monitoring</b>		P
<b>4.8.3.5.1</b>	<b>General</b>		P
	Where required by Table 30, the inverter shall provide residual current monitoring that functions whenever the inverter is connected to the mains with the automatic disconnection means closed.		P
	The residual current monitoring means shall measure the total (both a.c. and d.c. components) RMS current.		P
	As indicated in Table 30 for different inverter types, array types, and inverter isolation levels, detection may be required for excessive continuous residual current, excessive sudden changes in residual current, or both, according to the following limits:		P
	a) Continuous residual current: The inverter shall disconnect within 0,3 s and indicate a fault in accordance with 13.9 if the continuous residual current exceeds:		P
	- maximum 300 mA for inverters with continuous output power rating $\leq 30$ kV;		N/A
	- maximum 10 mA per kVA of rated continuous output power for inverters with continuous output power rating $> 30$ kVA.		P
	The inverter may attempt to re-connect if the array insulation resistance meets the limit in 4.8.2.		P
	b) Sudden changes in residual current: The inverter shall disconnect from the mains within the time specified in Table 31		P
	The inverter indicates a fault in accordance with 13.9, if a sudden increase in the RMS residual current is detected exceeding the value in the table.		P
	The inverter may attempt to re-connect if the array insulation resistance meets the limit in 4.8.2.		P
<b>4.8.3.5.2</b>	<b>Test for detection of excessive continuous residual current: test repeated 5 times and time to disconnect shall not exceed 0,3 s.</b>	See appended test table 4.8.3.5.2 Test for detection of excessive continuous residual current	P
<b>4.8.3.5.3</b>	<b>Test for detection of sudden changes in residual</b>		P

IEC 62109-2			
Clause	Requirement + Test	Result - Remark	Verdict
	<b>current repeated 5 times and each of the 5 results shall not exceed the time limit indicated in for each row (30mA, 60mA and 150mA) of Table 31.</b>		
<b>4.8.3.6</b>	<b>Systems located in closed electrical operating areas</b>		N/A
	<b>The protection against shock hazard is not required if the installation information provided with the inverter indicates the restriction for use in a closed electrical operating area, and</b>		N/A
	Installation information indicates what forms of shock hazard protection are and are not provided integral to the inverter, in accordance with 5.3.2.7.		N/A
	The inverter shall be marked as in 5.2.2.6.		N/A
<b>5</b>	<b>MARKING AND DOCUMENTATION</b>		P
<b>5.1</b>	<b>Marking</b>		P
<b>5.1.4</b>	<b>Equipment ratings</b>		P
	PV input ratings:		P
	- V <sub>max</sub> PV (absolute maximum) (d.c. V)		P
	- I <sub>sc</sub> PV (absolute maximum) (d.c. A)		P
	a.c. output ratings:		P
	- Voltage (nominal or range) (a.c. V)		P
	- Current (maximum continuous) (a.c. A)		P
	- Frequency (nominal or range) (Hz)		P
	- Power (maximum continuous) (W or VA)		P
	- Power factor range		P
	a.c. input ratings:		N/A
	- Voltage (nominal or range) (a.c. V)		N/A
	- Current (maximum continuous) (a.c. A)		N/A
	- Frequency (nominal or range) (Hz)		N/A
	d.c. output ratings:		N/A
	- Voltage (nominal or range) (d.c. V)		N/A
	- Current (maximum continuous) (d.c. A)		N/A
	Protective class (I or II or III)		P
	Ingress protection (IP) rating per part 1		P
	An inverter that is adjustable for more than one nominal output voltage shall be marked to indicate the particular voltage for which it is set when shipped from the factory.		N/A
<b>5.2</b>	<b>Warning markings</b>		P
<b>5.2.2</b>	<b>Content for warning markings</b>		P
<b>5.2.2.6</b>	<b>Inverters for closed electrical operating areas</b>		N/A
	Where required by 4.8.3.6, an inverter not provided with full protection against shock hazard on the PV array shall be marked with a warning that the inverter is only for use in a closed electrical operating area, and referring to the installation instructions.		N/A
<b>5.3</b>	<b>Documentation</b>		P
<b>5.3.2</b>	<b>Information related to installation</b>		P



IEC 62109-2			
Clause	Requirement + Test	Result - Remark	Verdict
<b>5.3.2.1</b>	<b>Ratings. Subclause 5.3.2 of Part 1 requires the documentation to include ratings information for each input and output. For inverters this information shall be as in Table 33 below. Only those ratings that are applicable based on the type of inverter are required.</b>		P
	PV input quantities:		P
	- Vmax PV (absolute maximum) (d.c. V)		P
	- PV input operating voltage range (d.c. V)		P
	- Maximum operating PV input current (d.c. A)		P
	- Isc PV (absolute maximum) (d.c. A)		P
	- Isc PV (absolute maximum) (d.c. A)		P
	- Max. inverter backfeed current to the array (a.c. or d.c. A)		P
	a.c. output quantities:		P
	- Voltage (nominal or range) (a.c. V)		P
	- Current (maximum continuous) (a.c. A)		P
	- Current (inrush) (a.c. A, peak and duration)		P
	- Frequency (nominal or range) (Hz)		P
	- Power (maximum continuous) (W or VA)		P
	- Power factor range		P
	- Maximum output fault current (a.c. A, peak and duration or RMS)		P
	- Maximum output overcurrent protection (a.c. A)		P
	a.c. input quantities:		N/A
	- Voltage (nominal or range) (a.c. V)		N/A
	- Current (maximum continuous) (a.c. A)		N/A
	- Current (inrush) (a.c. A, peak and duration)		N/A
	- Frequency (nominal or range) (Hz)		N/A
	d.c input (other than PV) quantities:		N/A
	- Voltage (nominal or range) (d.c. V)		N/A
	- Nominal battery voltage (d.c. V)		N/A
	- Current (maximum continuous) (d.c. A)		N/A
	d.c. output quantities:		N/A
	- Voltage (nominal or range) (d.c. V)		N/A
	- Nominal battery voltage (d.c. V)		N/A
	- Current (maximum continuous) (d.c. A)		N/A
	Protective class (I or II or III)		P
	Ingress protection (IP) rating per part 1		P
<b>5.3.2.2</b>	<b>Grid-interactive inverter setpoints</b>		N/A
	For a grid-interactive unit with field adjustable trip points, trip times, or reconnect times, the presence of such controls, the means for adjustment, the factory default values, and the limits of the ranges of adjustability shall be provided in the documentation for the PCE or in other format such as on a website. Provided solution: .....		N/A
	The setting of field adjustable setpoints shall be accessible from the PCE		N/A
<b>5.3.2.3</b>	<b>Transformers and isolation</b>		N/A

IEC 62109-2			
Clause	Requirement + Test	Result - Remark	Verdict
	whether an internal isolation transformer is provided, and if so, what level of insulation (functional, basic, reinforced, or double) is provided by that transformer. The instructions shall also indicate what the resulting installation requirements are regarding such things as earthing or not earthing the array, providing external residual current detection devices, etc.		N/A
	An inverter shall be provided with information to the installer regarding:		N/A
	- providing of internal isolation transformer		N/A
	- the level of insulation (functional, basic, reinforced, or double)		N/A
	The instructions shall also indicate what the resulting installation requirements are regarding:		N/A
	- earthing or not earthing the array		N/A
	- providing external residual current detection devices		N/A
	- requiring an external isolation transformer,		N/A
<b>5.3.2.4</b>	<b>Transformers required but not provided</b>		N/A
	An inverter that requires an external isolation transformer not provided with the unit, shall be provided with instructions that specify, and for the external isolation transformer with which it is intended to be used:		N/A
	- the configuration type		N/A
	- electrical ratings		N/A
	- environmental ratings		N/A
<b>5.3.2.5</b>	<b>PV modules for non-isolated inverters</b>		P
	Non-isolated inverters shall be provided with installation instructions that require PV modules that have an IEC 61730 Class A rating		P
	If the maximum AC mains operating voltage is higher than the PV array maximum system voltage then the instructions shall require PV modules that have a maximum system voltage rating based upon the AC mains voltage.		N/A
<b>5.3.2.6</b>	<b>Non-sinusoidal output waveform information</b>		N/A
	The instruction manual for a stand-alone inverter not complying with 4.7.5.2 shall include a warning that:		N/A
	- the waveform is not sinusoidal,		N/A
	- some loads may experience increased heating,		N/A
	- the user should consult the manufacturers of the intended load equipment before operating that load with the inverter		N/A
	The inverter manufacturer shall provide information regarding:		N/A
	- what types of loads may experience increased heating		N/A
	- recommendations for maximum operating times with such loads		N/A
	The inverter manufacturer shall specify for the waveforms as determined by the testing in 4.7.5.3.2 through 4.7.5.3.4.:		N/A
	- THD		N/A
	- slope		N/A

IEC 62109-2			
Clause	Requirement + Test	Result - Remark	Verdict
	- peak voltage		N/A
<b>5.3.2.7</b>	<b>Systems located in closed electrical operating areas</b>		N/A
	Where required by 4.8.3.6, an inverter not provided with full protection against shock hazard on the PV array shall be provided with installation instructions:		N/A
	- requiring that the inverter and the array must be installed in closed electrical operating areas		N/A
	- indicating which forms of shock hazard protection are and are not provided integral to the inverter (for example the RCD, isolation transformer complying with the 30 mA touch current limit, or residual current monitoring for sudden changes)		N/A
<b>5.3.2.8</b>	<b>Stand-alone inverter output circuit bonding</b>		N/A
	Where required by 7.3.10, the documentation for an inverter shall include the following:		N/A
	- if output circuit bonding is required but is not provided integral to the inverter, the required means shall be described in the installation instructions, including which conductor is to be bonded and the required current carrying capability or cross-section of the bonding means;		N/A
	- if the output circuit is intended to be floating, the documentation for the inverter shall indicate that the output is floating.		N/A
<b>5.3.2.9</b>	<b>Protection by application of RCD's</b>	Integrated GFCI used inside	N/A
	Where the requirement for additional protection in 4.8.3.1 is met by requiring an RCD that is not provided integral to the inverter, as allowed by 4.8.3.4, the installation instructions shall state the need for the RCD,.		N/A
	and shall specify its rating, type, and required circuit location		N/A
<b>5.3.2.10</b>	<b>Remote indication of faults</b>		P
	The installation instructions shall include an explanation of how to properly make connections to (where applicable), and use, the electrical or electronic fault indication required by 13.9.		P
<b>5.3.2.11</b>	<b>External array insulation resistance measurement and response</b>	Integrated resistance measurement inside	N/A
	The installation instructions for an inverter for use with ungrounded arrays that does not incorporate all the aspects of the insulation resistance measurement and response requirements in 4.8.2.1, must include:		N/A
	- for isolated inverters: an explanation of what aspects of array insulation resistance measurement and response are not provided, and		N/A
	- an instruction to consult local regulations to determine if any additional functions are required or not;		N/A

IEC 62109-2			
Clause	Requirement + Test	Result - Remark	Verdict
	- for non-isolated inverters: an explanation of what external equipment must be provided in the system, and		N/A
	- what the setpoints and response implemented by that equipment must be, and:		N/A
	- how that equipment is to be interfaced with the rest of the system.		N/A
<b>5.3.2.12</b>	<b>Array functional grounding information</b>		N/A
	Where approach a) of 4.8.2.2 is used, the installation instructions for the inverter shall include all of the following:		N/A
	a) the value of the total resistance between the PV circuit and ground integral to the inverter .....		N/A
	b) the minimum array insulation resistance to ground that system designer or installer must meet when selecting the PV panel and system design, based on the minimum value that the design of the PV functional grounding in the inverter was based on .....		N/A
	c) the minimum value of the total resistance $R = V_{MAX} PV/30 \text{ mA}$ that the system must meet, with an explanation of how to calculate the total .....		N/A
	d) a warning that there is a risk of shock hazard if the total minimum resistance requirement is not met.		N/A
<b>5.3.2.13</b>	<b>Stand-alone inverters for dedicated loads</b>		N/A
	Where the approach of 4.7.5.5 is used, the installation instructions for the inverter shall include a warning that the inverter is only to be used with the dedicated load for which it was evaluated, and		N/A
	shall specify the dedicated load.		N/A
<b>5.3.2.14</b>	<b>Identification of firmware version(s)</b>		P
	An inverter utilizing firmware for any protective functions shall provide means to identify the firmware version.		P
	This can be a marking, but the information can also be provided by a display panel, communications port or any other type of user interface.....		P
<b>7</b>	<b>PROTECTION AGAINST ELECTRIC SHOCK AND ENERGY HAZARDS</b>		P
<b>7.3</b>	<b>Protection against electric shock</b>		P
<b>7.3.10</b>	<b>Additional requirements for stand-alone inverters</b>		N/A
	One circuit conductor bonded to earth to create a grounded conductor and an earthed system.		N/A
	The means used to bond the grounded conductor to protective earth provided within the inverter or		N/A
	as part of the installation		N/A
	If not provided integral to the inverter, the required means shall be described in the installation instructions as per 5.3.2.8.		N/A

IEC 62109-2			
Clause	Requirement + Test	Result - Remark	Verdict
	The means used to bond the grounded conductor to protective earth shall comply with the requirements for protective bonding in Part 1,		N/A
	If the bond can only ever carry fault currents in stand-alone mode, the maximum current for the bond is determined by the inverter maximum output fault current.		N/A
	Output circuit bonding arrangements shall ensure that in any mode of operation, the system only has the grounded circuit conductor bonded to earth in one place at a time.		N/A
	Switching arrangements may be used, in which case the switching device used is to be subjected to the bond impedance test along with the rest of the bonding path		N/A
	Inverters intended to have a circuit conductor bonded to earth shall not impose any normal current on the bond except for leakage current.		N/A
	Outputs that are intentionally floating with no circuit conductor bonded to ground, must not have any voltages with respect to ground that are a shock hazard in accordance with Clause 7 of Parts 1 and 2.		N/A
	The documentation for the inverter shall indicate that the output is floating as per 5.3.2.8.		N/A
<b>7.3.11</b>	<b>Functionally grounded arrays</b>		N/A
	All PV conductors in a functionally grounded array shall be treated as being live parts with respect to protection against electric shock.		N/A
<b>9</b>	<b>PROTECTION AGAINST FIRE HAZARDS</b>		P
<b>9.3</b>	<b>Short-circuit and overcurrent protection</b>		P
<b>9.3.4</b>	<b>Inverter backfeed current onto the array</b>		P
	The backfeed current testing and documentation requirements in Part 1 apply, including but not limited to the following.		P
	Inverter backfeed current onto the PV array maximum value.....	0A	P
	This inverter backfeed current value shall be provided in the installation instructions regardless of the value of the current, in accordance with Table 33.		P
<b>13</b>	<b>PHYSICAL REQUIREMENTS</b>		P
<b>13.9</b>	<b>Fault indication</b>		P
	Where this Part 2 requires the inverter to indicate a fault, both of the following shall be provided:		P
	a) a visible or audible indication, integral to the inverter, and detectable from outside the inverter, and		P
	b) an electrical or electronic indication that can be remotely accessed and used.		P

IEC 62109-2			
Clause	Requirement + Test	Result - Remark	Verdict
	The installation instructions shall include information regarding how to properly make connections (where applicable) and use the electrical or electronic means in b) above, in accordance with 5.3.2.10.		P

IEC 62109-2			
Clause	Requirement + Test	Result - Remark	Verdict

4.4.4	TABLE: Single fault condition to be applied					P
	Ambient temperature (°C) ..... :				25	—
	Power source for EUT: Manufacturer, model/type, output rating ..... :				--	—
4.4.4.15.1	Fault-tolerance of residual current monitoring					
Component No.	Fault	Supply voltage (V)	Test time	Fuse #	Fuse current (A)	Observation
Q401	SC pin B/E	Input: 600Vdc Output: 230Vac(L-N)	5 min	--	--	Before the power-on, the faulty inverter fails to be powered on, and the 429 fault is reported. After the fault is rectified, the inverter cannot be powered on. After the power-on and power-off, the inverter runs normally in grid connection. No damage, no hazard.
Q401	SC pin C/E	Input: 600Vdc Output: 230Vac(L-N)	5 min	--	--	Before the power-on, the faulty inverter fails to be powered on, and the 429 fault is reported. After the fault is rectified, the inverter cannot be powered on. After the power-on and power-off, the inverter runs normally in grid connection. No damage, no hazard.
U46	SC pin 8/3V3	Input: 600Vdc Output: 230Vac(L-N)	5 min	--	--	Before the power-on, the faulty inverter fails to be powered on, and the 108 fault is reported. After the fault is rectified, the inverter cannot be powered on. After the power-on and power-off, the inverter runs normally in grid connection. No damage, no hazard.
U46	SC pin 8/AGND	Input: 600Vdc Output: 230Vac(L-N)	5 min	--	--	Before the power-on, the faulty inverter fails to be powered on, and the 108 fault is reported. After the fault is rectified, the inverter cannot be powered on. After the power-on and power-off, the inverter runs normally in grid connection. No damage, no hazard.
Check that the residual current monitoring operates properly					Yes	
Supplementary information:						

4.4.4	TABLE: Single fault condition to be applied					P
	Ambient temperature (°C) .....	25				—
	Power source for EUT: Manufacturer, model/type, output rating .....	--				—

IEC 62109-2							
Clause	Requirement + Test				Result - Remark		Verdict
4.4.4.15.2	Fault-tolerance of automatic disconnecting means						
On the output board (ENE9FLT1)							
Component No.	Fault	Supply voltage (V)	Test time	Fuse #	Fuse current (A)	Observation	
Q1508	SC C/E	Input: 600Vdc Output: 230Vac(L-N)	5 min	--	--	Start up: the inverter reports a relay fault. Running: The inverter is running properly	
Q1508	SC B/E	Input: 600Vdc Output: 230Vac(L-N)	5 min	--	--	Startup: The INVERTER follows the startup process and reports a relay fault when the INVERTER shuts down immediately after the grid is connected. Running: The inverter shuts down due to an alarm and reports a relay fault.	
Q1507	SC C/E	Input: 600Vdc Output: 230Vac(L-N)	5 min	--	--	Start up: the inverter reports a relay fault. Running: The inverter is running properly	
Q1507	SC B/E	Input: 600Vdc Output: 230Vac(L-N)	5 min	--	--	Startup: The INVERTER follows the startup process and reports a relay fault when the INVERTER shuts down immediately after the grid is connected. Running: The inverter shuts down due to an alarm and reports a relay fault.	
Q1502	SC C/E	Input: 600Vdc Output: 230Vac(L-N)	5 min	--	--	Start up: the inverter reports a relay fault. Running: The inverter is running properly	
Q1502	SC B/E	Input: 600Vdc Output: 230Vac(L-N)	5 min	--	--	Startup: The INVERTER follows the startup process and reports a relay fault when the INVERTER shuts down immediately after the grid is connected. Running: The inverter shuts down due to an alarm and reports a relay fault.	
Check that the relays fulfil the basic insulation or simple separation based on the PV circuit working voltage.					There are two relays in serial used as automatic disconnection means. Contact gap is >1.8 mm for each relay.		
Each active phase can be switched. (L and N)					Yes		
Supplementary information:							



IEC 62109-2					
Clause	Requirement + Test			Result - Remark	Verdict
4.4.4.17	Cooling system failure – Blanketing test				P
	Test model:	HS-P160GLO	HS-P160GLO		—
	Test voltage (Vdc) .....	540 VDC	800 VDC		
	Test current (Idc)	284.98 A	191.29		—
	Test voltage (Vac) .....	230/400 VAC	230/400 VAC		—
	Test current (Iac)	651.57 A	653.23 A		—
	t <sub>amb1</sub> (°C) .....	25	25		—
	t <sub>amb2</sub> (°C) .....	25	25		—
maximum temperature T of part/at:		T (°C)			T <sub>max</sub> (°C)
Enclosure		72.8	78.1		90
Heat sink surface		80.6	87.2		90
Supplementary information:					

4.7.4	TABLE: Steady state Inverter AC output voltage and frequency			N/A
	Nominal DC input (V) Nominal output AC voltage (V) :			
AC output U (V)	Frequency (Hz)	Condition/status	Comments	
		Without load		
		Resistive load application		
		Resistive load removal		
Supplementary information:				

4.8.2	TABLE: Array insulation resistance detection for inverters for ungrounded and functionally grounded arrays				P
4.8.2.1	Array insulation resistance detection for inverters for ungrounded arrays				P
DC Voltage below minimum operating voltage (V)	DC Voltage for inverter begin operation (V)	Resistance between ground and PV input terminal (Ω)	Required Insulation resistance R = (V <sub>MAX PV</sub> / 30mA) (Ω)	Result	
DC+					

IEC 62109-2				
Clause	Requirement + Test		Result - Remark	Verdict
180V	200 V	33.3 kohm	36.67 kohm	the PCE cannot connect to the mains and display "Low Insulation Resistance"
180V	200 V	33.3 kohm	36.67 kohm	the PCE cannot connect to the mains and display "Low Insulation Resistance"
180V	200 V	33.3 kohm	36.67 kohm	the PCE cannot connect to the mains and display "Low Insulation Resistance"
180V	200 V	33.3 kohm	36.67 kohm	the PCE cannot connect to the mains and display "Low Insulation Resistance"
180V	200 V	33.3 kohm	36.67 kohm	the PCE cannot connect to the mains and display "Low Insulation Resistance"
DC-				
180V	200 V	33.3 kohm	36.67 kohm	the PCE cannot connect to the mains and display "Low Insulation Resistance"
180V	200 V	33.3 kohm	36.67 kohm	the PCE cannot connect to the mains and display "Low Insulation Resistance"
180V	200 V	33.3 kohm	36.67 kohm	the PCE cannot connect to the mains and display "Low Insulation Resistance"
180V	200 V	33.3 kohm	36.67 kohm	the PCE cannot connect to the mains and display "Low Insulation Resistance"
180V	200 V	33.3 kohm	36.67 kohm	the PCE cannot connect to the mains and display "Low Insulation Resistance"

IEC 62109-2			
Clause	Requirement + Test	Result - Remark	Verdict
<p>Note:</p> <p>For isolated inverters, shall indicate a fault in accordance with 13.9 (operation is allowed); the fault indication shall be maintained until the array insulation resistance has recovered to a value higher than the limit above.</p> <p>For non-isolated inverters, or inverters with isolation not complying with the leakage current limits in the minimum inverter isolation requirements in Table 30, shall indicate a fault in accordance with 13.9, and shall not connect to the mains; the inverter may continue to make the measurement, may stop indicating a fault and may connect to the mains if the array insulation resistance has recovered to a value higher than the limit above.</p> <p>It is not required to test all PV input terminals if analysis of the design indicates that one or more terminals can be expected to have the same result, for example where multiple PV string inputs are in parallel.</p> <p>Supplementary information:</p>			

4.8.3.2	TABLE: 30mA touch current type test for isolated inverters		N/A
Condition		Current (mA)	Limit (30mA)
--		--	--
<p>Supplementary information:</p> <p>The touch current measurement circuit of IEC 60990, Figure 4 is connected from each terminal of the array to ground, one at a time.</p>			

4.8.3.3	TABLE: Fire hazard residual current type test for isolated inverters		N/A
Condition		Current (mA)	Limit (300mA or 10mA per kVA)
--		--	--
Supplementary information:			


4.8.3.5	TABLE: Protection by residual current monitoring		P
Test conditions:		Output power (kVA): 165 Input voltage (V <sub>DC</sub> ): 800 Frequency (Hz): 50 Output AC Voltage (V <sub>AC</sub> ): 230/400V	
4.8.3.5.2	Test for detection of excessive continuous residual current		P
Fault Current (mA)		Disconnection time (ms)	
Measured Fault Current	Limit 300mA for output power ≤ 30 kVA 10mA per kVA for output power > 30 kVA	Measured Disconnection time	Limit
+ PV to N:			
1543	1650	268	300

IEC 62109-2			
Clause	Requirement + Test	Result - Remark	Verdict
1542	1650	280	300
1516	1650	296	300
1546	1650	280	300
1508	1650	290	300
- PV to N:			
1543	1650	268	300
1542	1650	260	300
1554	1650	280	300
1542	1650	280	300
1546	1650	290	300
Note: – maximum 300mA for inverters with continuous output power rating ≤30 kVA; – maximum 10mA per kVA of rated continuous output power for inverters with continuous output power rating > 30 kVA. This test shall be repeated 5 times, and for all 5 tests the time to disconnect shall not exceed 0,3s. The test is repeated for each PV input terminal. It is not required to test all PV input terminals if analysis of the design indicates that one or more terminals can be expected to have the same result, for example where multiple PV string inputs are in parallel.			
Supplementary information:			

4.8.3.5.3	TABLE: Test for detection of sudden changes in residual current		P
+PV to N			
Limit (mA)	U <sub>N</sub>		Limit (ms)
	Disconnection time (ms)		
30	258		300
30	265		300
30	270		300
30	261.5		300
30	272		300
60	127		150
60	129		150
60	127		150
60	133		150
60	129.5		150
150	35.0		40
150	36.5		40
150	36.5		40
150	35.4		40
150	36.6		40
-PV to N			
Limit (mA)	U <sub>N</sub>		Limit (ms)
	Disconnection time (ms)		

IEC 62109-2			
Clause	Requirement + Test	Result - Remark	Verdict
30	264		300
30	263		300
30	266.5		300
30	259		300
30	263.5		300
60	120		150
60	129		150
60	130		150
60	134		150
60	132		150
150	34.0		40
150	35.0		40
150	35.0		40
150	30.0		40
150	33.5		40
Note: The capacitive current is raised until disconnection. Test condition: $I_c + 30/60/150\text{mA} \leq I_{c\text{max}}$ . $R_1$ is set that 30/60/150mA Flow and switch S is closed.			
Supplementary information:			

Appendix 1: photos

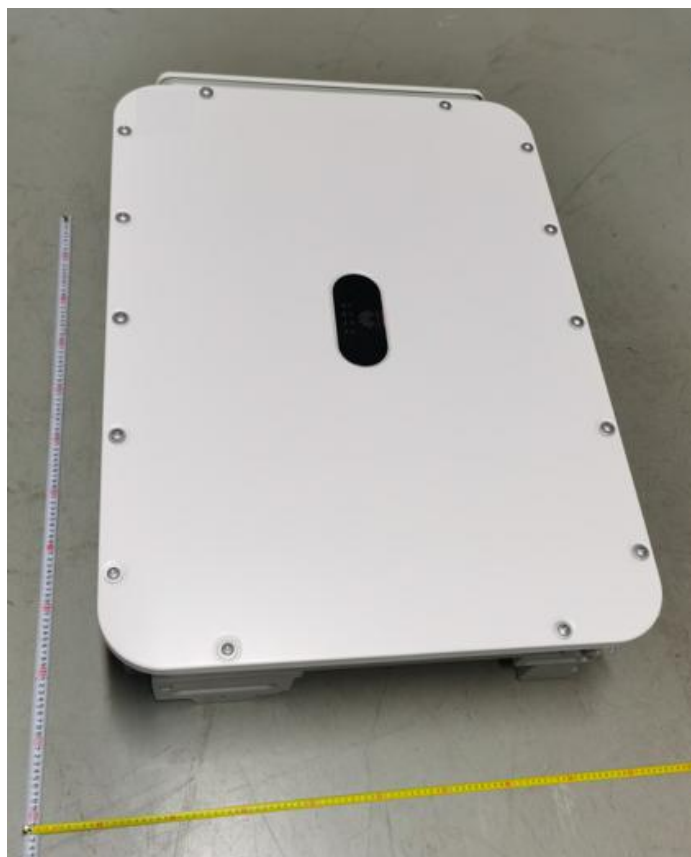


Front view



Bottom view



Overview (left side)

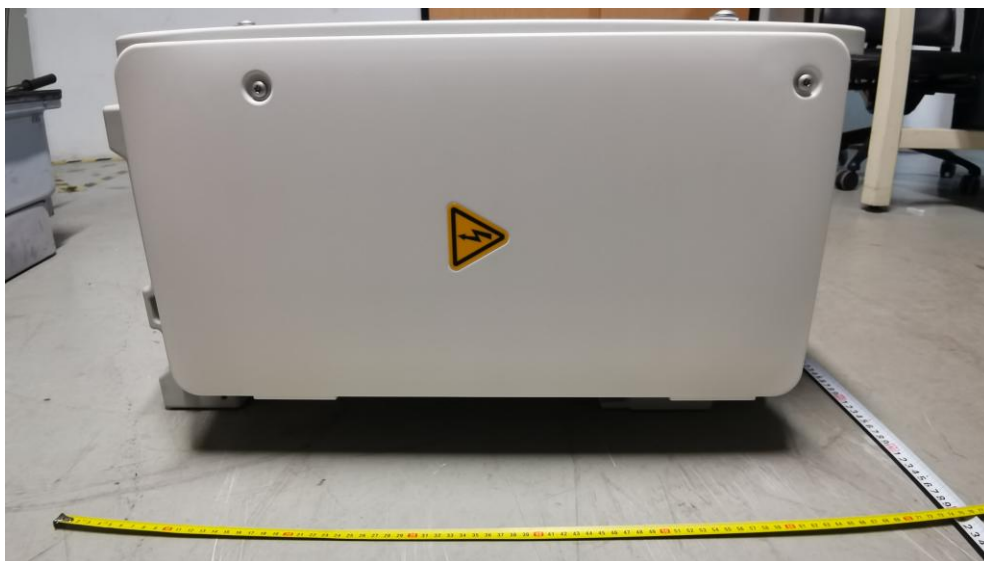

Overview (right side)



Overview (rear side)





Overview (top view)  
(End of Report)